

## CPA-P-808



- hydrostatic level transmitter
- detachable probe, diameter 35 mm
- nominal pressure: from 0...1 mH<sub>2</sub>O up to 0...100 mH<sub>2</sub>O
- output signals: 2-wire: 4...20 mA; 3-wire: 0...20 mA / 0...10 V
- stainless steel sensor
- plastic probe
- accuracy 0.25 % / 0.35 % span
- small thermal effect, excellent linearity
- optional: different kinds of cables and seals



The detachable plastic probe **CPA-P-808** is designed for level measurement of water, waste water as well as fuels and oils. Basic element is a piezoresistive stainless steel sensor. In order to facilitate stock-keeping and maintenance the transmitter head is plugged to the cable assembly with a connector and can be changed easily.

### PREFERRED AREAS OF USE ARE



**Water / filtrated sewage**  
 ground water level measurement  
 storm water systems  
 drinking water system  
 water treatment plants



**Fuel / Oil**  
 fuel storage  
 tank farm  
 biogas plants  
 process water recycling

### TECHNICAL DATA

Input pressure range												
Nominal pressure gauge [bar]	0.1	0.16	0.25	0.4	0.6	1	1.6	2.5	4	6	10	
Level [mH <sub>2</sub> O]	1	1.6	2.5	4	6	10	16	25	40	60	100	
Overpressure [bar]	0.5	1	1	2	5	5	10	10	20	40	40	
Burst pressure ≥ [bar]	1.5	1.5	1.5	3	7.5	7.5	15	15	25	50	50	
max. ambient pressure (housing)	20 bar											

Output signal / Supply	
Standard	2-wire: 4 ... 20 mA / V <sub>S</sub> = 8 ... 32 V <sub>DC</sub>
Options	3-wire: 0 ... 20 mA / V <sub>S</sub> = 14 ... 30 V <sub>DC</sub> 0 ... 10 V / V <sub>S</sub> = 14 ... 30 V <sub>DC</sub>

Performance	
Accuracy	standard: nominal pressure < 0.4 bar: ≤ ± 0.5 % span nominal pressure ≥ 0.4 bar: ≤ ± 0.35 % span option 1: nominal pressure ≥ 0.4 bar: ≤ ± 0.25 % span
Permissible load	current 2-wire: R <sub>max</sub> = [(V <sub>S</sub> - V <sub>S</sub> min) / 0.02 A] Ω current 3-wire: R <sub>max</sub> = 500 Ω voltage 3-wire: R <sub>min</sub> = 10 kΩ
Influence effects	supply: 0.05 % span / 10 V load: 0.05 % span / kΩ
Long term stability	≤ ± 0.1 % span / year
Response time	< 10 msec

<sup>1</sup> accuracy according to EN IEC 62828-2—limit point adjustment (non-linearity, hysteresis, repeatability)

Thermal effects (Offset and Span)		
Nominal pressure P <sub>N</sub> [bar]	< 0.40	≥ 0.40
Tolerance band [% span]	≤ ± 1	≤ ± 0.75
in compensated range [°C]	0 ... 50	

Permissible temperatures	
Permissible temperatures	Medium/ electronics/ environment/ storage: -20 ... 80 °C *

\*If the cable is intended for use in a smaller temperature range, the use of the probe is limited by this range.

Electrical protection <sup>2</sup>	
Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function
Lightning protection	2-wire: integrated      3-wire: without
Electromagnetic compatibility	emission and immunity according to EN 61326

<sup>2</sup> additional external overvoltage protection unit in terminal box KL 1 or KL 2 with atmospheric pressure reference available on request



# Level transmitters

Electrical connection		
Cable with sheath material <sup>3</sup>	PVC (-5 ... 70 °C) grey (-25 ... 70 °C in fixed condition) PUR (-25 ... 80 °C) black (with drinking water certificate) FEP <sup>4</sup> (-25 ... 75 °C) black	Ø 7,4 mm Ø 7,4 mm Ø 7,4 mm
Cable capacitance	signal line/shield also signal line/signal line: 160 pF/m	
Cable inductance	signal line/shield also signal line/signal line: 1 µH/m	
Bending radius	static installation: 10-fold cable diameter, dynamic application: 20-fold cable diameter	
<sup>3</sup> shielded cable with integrated air tube for atmospheric pressure reference		
<sup>4</sup> do not use freely suspended probes with an FEP cable if effects due to highly charging processes are expected		
Materials (media wetted)		
Housing	PP-HT	
Seals	FKM EPDM	
Diaphragm	stainless steel 1.4435 (316L)	
Cable sheath	PVC, PUR, FEP, others on request	
Protection cap	POM-C	
Miscellaneous		
Option cable protection (on request)	prepared for mounting with PP-HT pipe Ø 25 mm; available as compact product (standard: pipe with a total length up to 2 m possible)	
Current consumption	signal output current: max. 25 mA signal output voltage: max. 7 mA	
Weight	approx. 400 g (without cable)	
Ingress protection	IP 68	
CE-conformity	EMC Directive: 2014/30/EU	


## ELECTRICAL CONNECTION

Wiring diagrams		
2-wire-system (current)	3-wire-system (current / voltage)	M12x1 (4-pin)
Pin configuration		
Electrical connection	Binder serie 723 <sup>6</sup> (4-pin)	cable colours (DIN 47100)
Supply +	3	wh (white)
Supply -	4	bn (brown)
Signal + (only 3-wire)	1	gn (green)
Shield	2	gn/ye (green / yellow)
<sup>6</sup> in detached version		




## DIMENSION DRAWINGS

standard

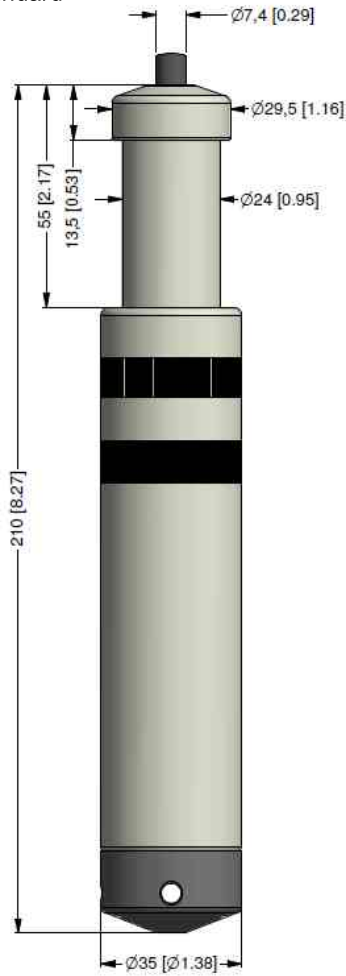

option

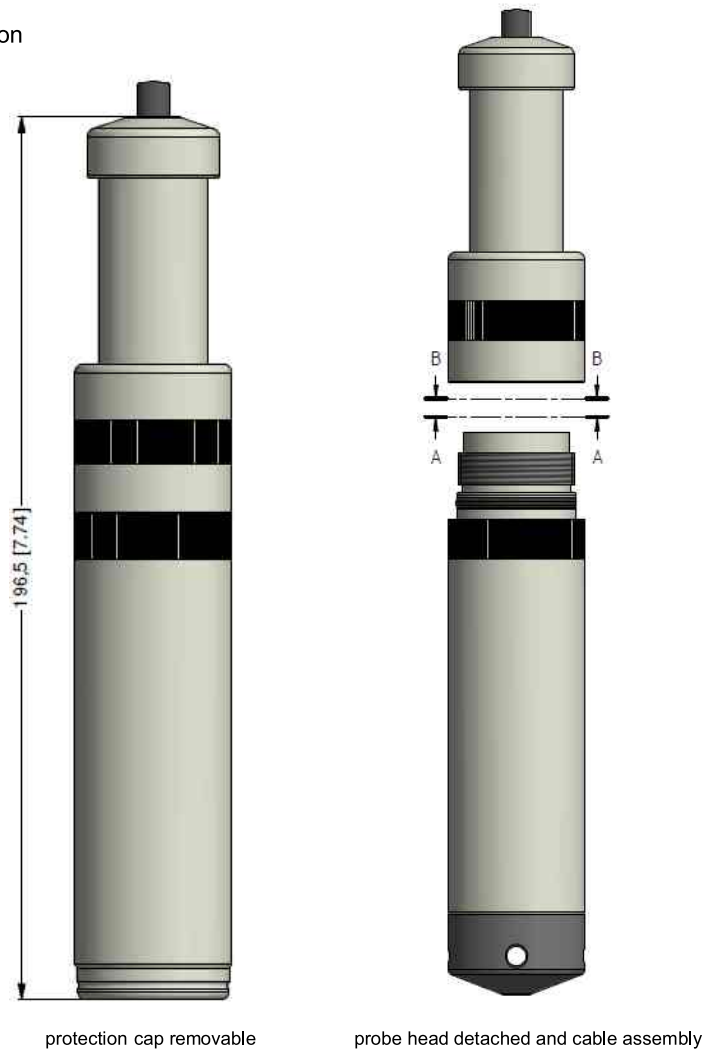

protection cap removable

probe head detached and cable assembly

## ACCESSORIES

### Mounting flange with cable gland

#### Technical data

Suitable for	all probes
Flange material	stainless steel 1.4404 (316L)
Material of cable gland	standard: brass, nickel plated on request: stainless steel 1.4305 (303); plastic
Seal insert	material: TPE (ingress protection IP 68)
Hole pattern	according to DIN 2507

Version	Size (in mm)	Weight
DN25 / PN40	D = 115, k = 85, b = 18, n = 4, d = 14	1.4 kg
DN50 / PN40	D = 165, k = 125, b = 20, n = 4, d = 18	3.2 kg
DN80 / PN16	D = 200, k = 160, b = 20, n = 8, d = 18	4.8 kg

#### Ordering type

Ordering type	Ordering code
DN25 / PN40 with cable gland brass, nickel plated	ZMF2540
DN50 / PN40 with cable gland brass, nickel plated	ZMF5040
DN80 / PN16 with cable gland brass, nickel plated	ZMF8016

#### Cable clamp


#### Technical Data

Suitable for	all probes with cable $\varnothing$ 5.5 ... 10.5 mm
Material	standard: steel, zinc plated optionally: stainless steel 1.4301 (304)
Weight	approx. 160 g

#### Ordering type

Ordering type	Ordering code
Terminal clamp, of steel, zinc plated	1003440
Terminal clamp, of stainless steel 1.4301 (304)	1000278

cable gland M16x1.5 with seal insert (for cable- $\varnothing$  4 ... 11 mm)

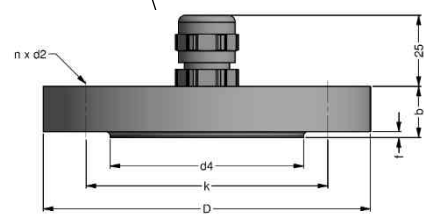

# Level transmitters

## ORDER CODE

CPA-P-808-    -    -  -  -  -  -  -    -

<b>Pressure</b>			
in bar			4 1 0
in m H <sub>2</sub> O			4 1 1
<b>Input</b>	<b>[mH<sub>2</sub>O]</b>	<b>[bar]</b>	
0 ... 1	0 ... 0,1		1 0 0 0
0 ... 1,6	0 ... 0,16		1 6 0 0
0 ... 2,5	0 ... 0,25		2 5 0 0
0 ... 4	0 ... 0,4		4 0 0 0
0 ... 6	0 ... 0,6		6 0 0 0
0 ... 10	0 ... 1		1 0 0 1
0 ... 16	0 ... 1,6		1 6 0 1
0 ... 25	0 ... 2,5		2 5 0 1
0 ... 40	0 ... 4		4 0 0 1
0 ... 60	0 ... 6		6 0 0 1
0 ... 100	0 ... 10		1 0 0 2
<b>Customer</b>			9 9 9 9
<b>Housing material</b>			
PP-HT			R
<b>Diaphragm material</b>			
Stainless steel 1.4435 (316 L)			1
<b>Output</b>			
4 ... 20 mA / 2-wire			1
0 ... 20 mA / 3-wire			2
0 ... 10 V / 3-wire <sup>3</sup>			3
0 ... 5 V / 3-wire <sup>3</sup>			4
4 ... 20 mA / 3-wire			7
<b>Customer</b>			9
<b>Seals</b>			
Viton (FKM)			1
EPDM			3
<b>Customer</b>			9
<b>Electrical connection</b>			
Without cable part			0
PVC - cable (grey, Ø 7,4 mm, price for 1 m) <sup>1</sup>			1
PUR - cable (black, Ø 7,4 mm, price for 1 m) <sup>1</sup>			2
FEP - cable with PTFE sheath (black, Ø 7,4 mm, price for 1 m) <sup>1</sup>			3
<b>Customer</b>			9
<b>Accuracy</b>			
0,5 % (P <sub>N</sub> ≤ 0,4 bar)			5
0,35 % (P <sub>N</sub> > 0,4 bar)			3
0,25 % (P <sub>N</sub> > 0,4 bar)			2
0,5 % including Calibration Certificate (P <sub>N</sub> ≤ 0,4 bar)			T
0,35 % including Calibration Certificate (P <sub>N</sub> > 0,4 bar)			S
Measured values table for accuracy 0,35 %			M
<b>Customer</b>			9
<b>Cable length</b>			
in m			9 9 9
<b>Special version</b>			
Standard			0 0 0
Prepared for mounting with protecting pipe Ø 20 mm <sup>2</sup>			1 0 6
<b>Customer</b>			9 9 9
<b>Accessories for submersible transmitter</b>			
Cabel part + price for cabel in m			5000695
Terminal clamp - zinc plated			1003440
Terminal clamp - stainless steel 1.4301			1000278
Mounting screw PG16 - plastic			5002200

- 1 - cable with integrated ventilation tube for atmospheric pressure reference
- 2 - pipe is not part of the supply
- 3 - maximum length of PVC cable - 25 m, PUR, FEP, TPE - 40 m

Manufacturer reserves the right to change sensor specifications without further notice.

