

Weigh Indicator/Controller

FEATURES

- High speed process control, 300 samples per second
- Batch, blend, and mix systems
- Up to 30 recipes with 24 activities each
- Excellent connectivity and operator interface
- Flow measurement capability
- Easy setup via front panel keypad or remote PC

APPLICATIONS

- Batch/blend/mix systems
- Multiple recipe controller
- Quality-critical process weighing
- Custom weighing applications

DESCRIPTION

The TAD 3 Weight Processor monitors and controls strain gage load-cell-based weighing systems. It has an A-D resolution of nearly 14 million counts and easily interfaces with other PC and PLC controllers via two communication ports. It can also be used with an external alphanumeric or graphical display, in addition to its integral backlit graphic liquid crystal display. High accuracy and very fast transmission rates make the TAD 3 ideal for advanced process control applications.


The TAD 3 recipe batching version allows storage of up to 30 recipes with up to 24 activities per recipe. Batching is carried out over separate, digital I/O units.



The batching version of the TAD 3 makes it possible to perform batching of up to six components in coarse and fine feeding phases. Other process functions like stirring, heating, dumping, etc. also can be controlled with the batching version.

A menu program leads the operator through all phases of the process. He can enter alphanumeric information in his own language on the graphic display. Another way to perform setup and calibration is to use the deltaCOM program on a PC (please see separate data sheet).

OUTLINE DIMENSIONS

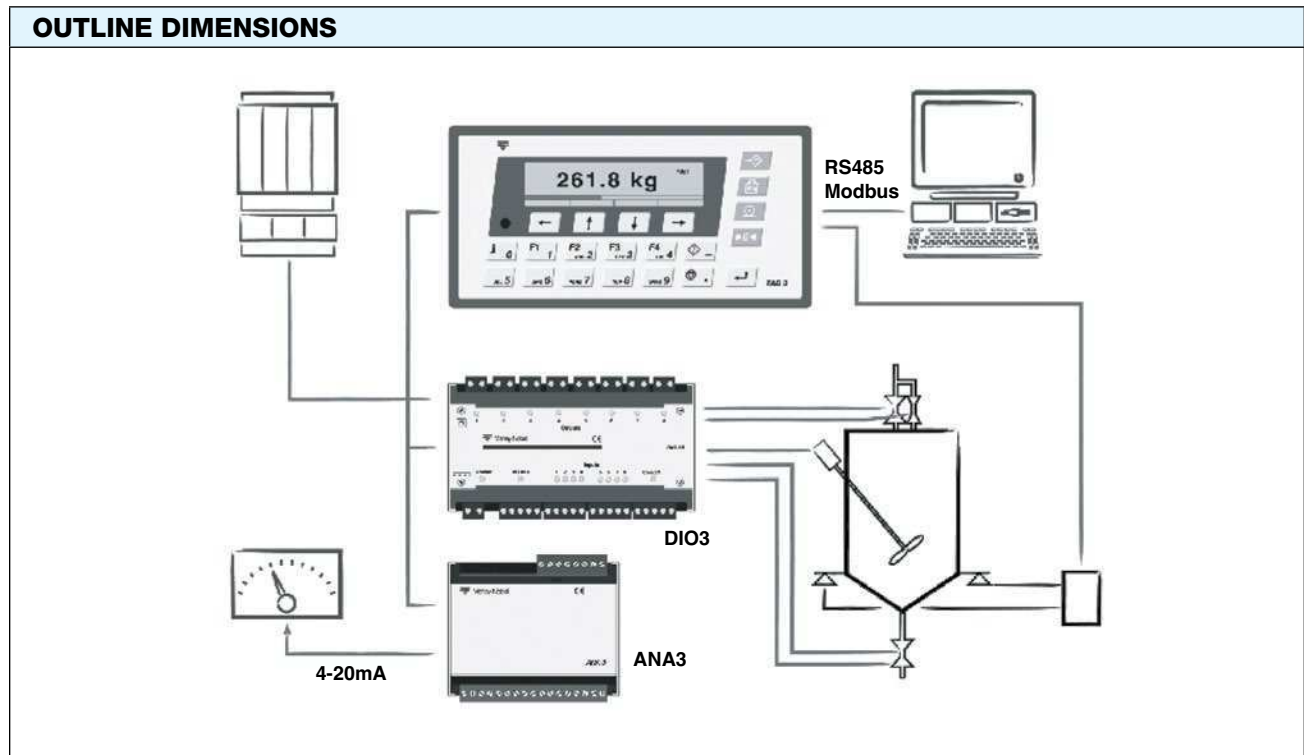

Weigh Indicator/Controller

SPECIFICATIONS		PARAMETER	VALUE
PERFORMANCE		Resolution	13 800 000 counts
Conversion speed			0.5 to 300 Hz, ratiometrically integrating converter
Update rate			0.5 to 60 Hz
Display divisions			100 000, legal 10 000
Minimum division			0.3 μ V, legal 0.5 μ V
Accuracy			0.002% of full scale
Full scale range			\pm 3.3 mV/V
Non-linearity			<0.002% of used range
Excitation voltage			9.7 VDC to 5.5 VDC with 1 to 8 of 350 Ω transducers
Number of 350 Ω I.c.			8 pcs (Total load >45 Ω)
Filter			0.04 to 20 seconds digital average. Adaptive filter.
Offset drift			< \pm 0.01 μ V/ $^{\circ}$ C
Gain drift			< \pm 0.00015% of actual value/ $^{\circ}$ C
Calibration methods			Data sheet, table, dead weight, shunt
ENVIRONMENTAL		Operating temperature	-10 $^{\circ}$ C to +50 $^{\circ}$ C
Storage temperature			-25 $^{\circ}$ C to +85 $^{\circ}$ C
Relative humidity			95%
IP level			IP 65 at the front end by panel mounting
FRONT PANEL		Display type and size	Graphic LCD with backlight, 248 \times 60 pixels (94 \times 20 mm)
Keyboard			Total of 21 buttons. Digit and character entry, -sign, decimal point, ENTER, 4 function buttons, tare, gross/net, print, zero
POWER SUPPLY		Voltage	24 VDC \pm 20%
Power consumption			8 W
DIGITAL INPUTS		Inputs	2 pcs
Type and load			24 VDC, 6 mA
RELAY OUTPUTS		Number	2 pcs (each with 1 switching group)
Load			max. 1 A, 30 VAC or VDC
		PARAMETER	VALUE
		COMMUNICATION INTERFACE, COM 1	
		Interface	RS-485/RS422 (two-wires or four-wires) or RS-232
		Protocol	MODBUS RTU or ASCII
		Baud rate	Up to 115.2 kbaud
		Function	For control communication (MODBUS RTU), external display/printer (ASCII) or fieldbus communication (via GATE 3S).
		COMMUNICATION INTERFACE, COM 2	
		Interface	RS-485/RS422 (two-wires or four-wires)
		Protocol	MODBUS RTU or ASCII
		Baud rate	Up to 460.8 kbaud
		Function	For control communication (MODBUS RTU), optional I/O units, external display/printer (ASCII) or fieldbus communication (via GATE 3S).
		MECHANICAL DATA	
		Dimensions	100 \times 200 \times 123 mm (H \times W \times D) Depth behind panel 135 mm (add 50 mm if D-sub connector is used for RS-232)
		Standard mounting	Panel mounting (max. 10 mm thick panel). Cut-out 92 \times 186 mm, r <5 mm.
		Connector type	Plug-in screw terminals, D-sub (RS-232)
		Certifications	CE, Welmec TC to OIML 10000e
		HARDWARE OPTIONS	
		Separate units, connected to a serial communication port of TAD 3.	
		Analog Output unit ANA 3 Two units can be connected to serial communication port COM 2 of TAD 3. See separate data sheet.	
		Digital I/O unit DIO 3 R Two units (up to four in special applications) with each 8 in-/outputs, can be connected to serial communication port COM 2 of TAD 3. See separate data sheet.	
		Gateway GATE 3/GATE 3S For fieldbus communication. One unit can be connected to one of the serial communication ports of TAD 3. See separate data sheet.	



Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.