

MAIN FEATURES


Standard encoder series for industrial environments with high mechanical resistance requirements. Specifically designed for direct mounting on motors or tachometric dynamos thanks to integrated elastic coupling which allows radial and / or axial motor shaft play.

- 3 channel encoder (A / B / Z) up to 24000 ppr
- Power supply up to +28 V DC with several electrical interfaces available
- Up to 500 kHz output frequency
- Cable or connector output
- Available with metal cover for heavy duty applications
- Integrated elastic couplig up to 10 mm bore diameter




ORDERING CODE	ER	721	A	M*	500	S	5/28	P	8	X	6	P	R	.XXX
SERIES incremental encoder series EL incremental encoder series ER														
MODEL fixing holes ø 63,5 mm 721 fixing holes ø 65 mm 722 fixing holes ø 57 mm 723 fixing holes ø 60 mm 724														
FLANGE TYPE flange type A flange type B														
METAL COVER * add for metal cover M														
RESOLUTION ppr from 1 to 24000 refer to the available pulses list														
ZERO PULSE without zero pulse S with zero pulse Z														
POWER SUPPLY (with L electrical interface) 5 V DC 5 5 ... 28 V DC 5/28														
ELECTRICAL INTERFACE NPN open collector C push-pull P line driver L power supply 5/28V - output RS-422 RS														
BORE DIAMETER mm 6 mm 8 mm 10														
ENCLOSURE RATING IP 54 X (mod. EL721 / EL722) IP 66 S														
MAX ROTATION SPEED (IP 66) 3000 rpm 3 (IP 54) 6000 rpm 6														
OUTPUT TYPE cable (standard length 1,5 m) P preferred cable lengths 2 / 3 / 5 / 10 m, to be added after DIRECTION TYPE (eg. PR5) MIL connector M JIS-C-5432 connector J M12 connector M12 M23 connector H IP40 IEC 60130-9 connector C female connector included, without female please add 162 as variant code														
DIRECTION TYPE axial A radial R														
VARIANT custom version XXX														


721 A

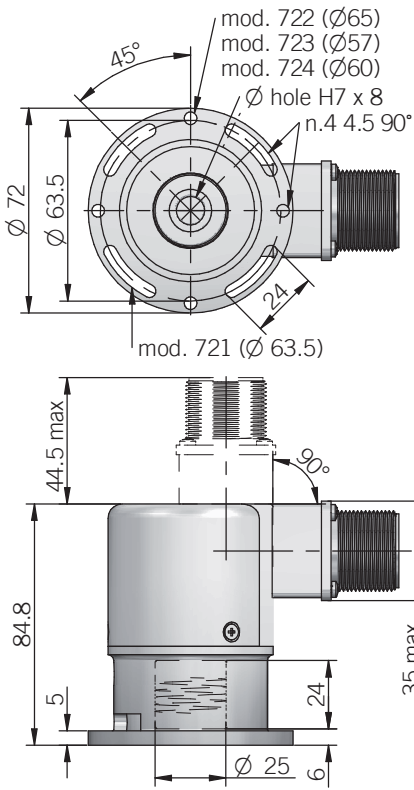

721 A IP 66

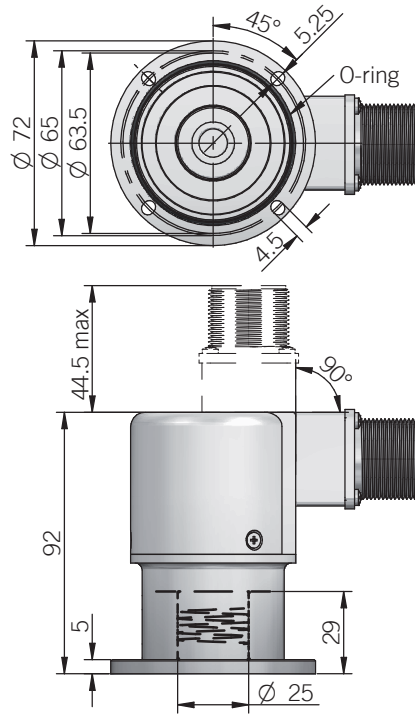


72 B flange version




oring is included

Dimensions with metal cover axial output

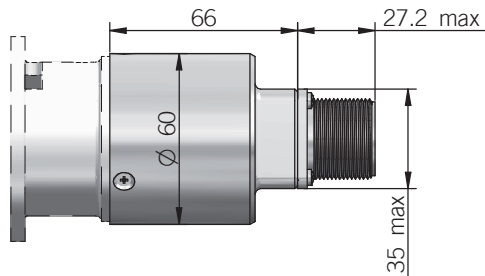

Dimensions with metal cover radial output

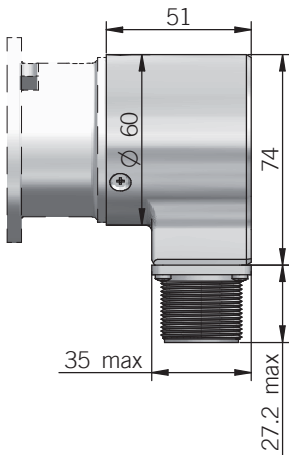

dimensions in mm

ELECTRICAL SPECIFICATIONS	
Resolution	from 1 to 24000 ppr
Power supply¹	5 = 4,5 ... 5,5 V DC 5/28 = 4,5 ... 30 V DC (reverse polarity protection)
Power draw without load	800 mW max
Max load current	C / P = 50 mA / channel L / RS = 20 mA / channel
Electrical interface²	NPN open collector (AEIC-7273, pull-up max +30 V DC) push-pull / line driver HTL (AEIC-7272) line driver RS-422 (AELT-5000 or equivalent)
Max output frequency	250 kHz up to 6000 ppr 500 kHz from 7200 ppr
Counting direction	A leads B clockwise (shaft view)
Electromagnetic compatibility	according to 2014/30/EU directive
RoHS	according to 2015/863/EU directive
UL / CSA	certificate n. E212495










EL SERIES RESOLUTIONS	
1 - 2 - 4 - 5 - 10 - 15 - 16 - 20 - 25 - 30 - 32 - 40 - 50 - 60 - 70 - 80 - 90 - 100* - 160 - 180 - 240* - 250* - 350 - 450 - 500* - 660 - 700 - 750 - 900* - 1000* - 1024* - 1250* - 1300* - 1500 - 1800* - 2000* - 2048* - 2500*	

* only with model EL721 / EL722 with "S" enclosure rating

ER SERIES RESOLUTIONS	
100 - 120 - 128 - 150 - 200 - 240 - 250 - 256 - 300 - 360 - 400 - 480 - 500 - 512 - 600 - 625 - 720 - 800 - 900 - 1000 - 1024 - 1200 - 1250 - 1440 - 1600 - 1800 - 2000 - 2048 - 2500 - 3000 - 3600 - 4000 - 4096 - 5000 - 6000 - 7200 - 8000 - 8192 - 9000 - 10000 - 10240 - 12000 - 14400 - 16000 - 16384 - 18000 - 20000 - 20480 - 24000	

please directly contact our offices for other pulses, preferred resolutions in bold

CONNECTIONS													
Function	Cable C / P	Cable L / RS	7 pin J C / P	7 pin J L / RS no Zero	7 pin M C / P	7 pin M L / RS no Zero	10 pin J L / RS with Zero	10 pin M L / RS with Zero	5 pin M12 C / P	8 pin M12 L / RS	12 pin H	5 pin C C / P	8 pin C L / RS
+V DC	red	red	6	4	F	D	4 - 5	D - E	2	7	12	5	7
0 V	black	black	1	6	A	F	6	F	4	1	10	1	8
A+	green	green	3	1	C	A	1	A	3	6	5	2	1
A-	/	brown or grey	/	3	/	C	7	G	/	5	6	/	2
B+	yellow	yellow	5	2	E	B	2	B	1	4	8	4	3
B-	/	orange	/	5	/	E	8	H	/	3	1	/	4
Z+	blue	blue	4	/	D	/	3	C	5	2	3	3	5
Z-	/	white	/	/	/	/	9	I	/	8	4	/	6
≡	shield	shield	7	7	G	G	10	J	housing	housing	9	/	/

<p>J connector (7 pin) JIS-C-5432 Size 16 solder side view FV</p> 	<p>M connector (7 pin) Amphenol MS3102-E-16-S solder side view FV</p> 	<p>M12 connector (5 pin) M12 A coded solder side view FV</p> 	<p>C connector (5 pin) IEC 60130-9 solder side view FV</p> 	<p>H connector (12 pin) - M23 CCW Hummel 7.410.000000 - 7.002.912.603 solder side view FV</p> 
<p>J connector (10 pin) JIS-C-5432 Size 16 solder side view FV</p> 	<p>M connector (10 pin) Amphenol MS3102-E-18-1 solder side view FV</p> 	<p>M12 connector (8 pin) M12 A coded solder side view FV</p> 	<p>C connector (8 pin) IEC 60130-9 solder side view FV</p> 	

MECHANICAL SPECIFICATIONS	
Bore diameter	∅ 6 / 8 / 10 mm
Enclosure rating	X = IP 54 (IEC 60529) S = IP 66 (IEC 60529)
Max rotation speed	IP 54 - 6000 rpm IP 66 - EL 3000 rpm / 60° C ER 3000 rpm / 70° C - 2000 rpm / 85° C
Shock	50 G, 11 ms (IEC 60068-2-27)
Vibration	10 G, 10 ... 2000 Hz (IEC 60068-2-6)
Moment of inertia	3,5 x 10 ⁻⁶ kgm ² (83 x 10 ⁻⁶ lbf ²)
Starting torque (at +20°C / +68°F)	< 0,02 Nm (2,83 Ozin) IP 54 < 0,04 Nm (5,66 Ozin) IP 66
Bearing stage material	EN-AW 2011 aluminum
Shaft material	1.4305 / AISI 303 stainless steel
Housing material	PA66 glass fiber reinforced / painted aluminum
Bearings	n.2 ball bearings
Bearings life	10 ⁹ revolutions
Operating temperature^{3,4}	-10° ... +60°C (+14° ... +140°F) EL series -25° ... +85°C (-13° ... +185°F) ER series
Storage temperature⁴	-25° ... +70°C (-13° ... +158°F)
Weight	400 g (14,11 oz)

¹ as measured at the transducer without cable influences

² for further details refer to OUTPUT LEVELS on TECHNICAL BASICS section

³ measured on the transducer flange

⁴ condensation not allowed