

High Temperature Load Cell

FEATURES

- Operational to 400°F
- Compact—rugged
- Low deflection
- Environmentally sealed
- 20,000 to 200,000 pound capacities

APPLICATIONS

- High temperature environments

DESCRIPTION


C2G1-H load cells operate at temperatures up to 400°F without needing external cooling. Ability to withstand extreme heat makes C2G1-H cells the perfect choice for weighing molten metals. Other applications include tank and scale installations in locations that are subject to intense heat.

Double diaphragm fabrication and gage linearizing combine to offer precision performance and long term reliability. Low deflection and superior sealing guarantee



trouble-free operation. Relatively low mass and small deflection under load, produce excellent frequency response. Overall, C2G1-H cells perform superbly in severe environments where other transducers cannot.

OUTLINE DIMENSIONS

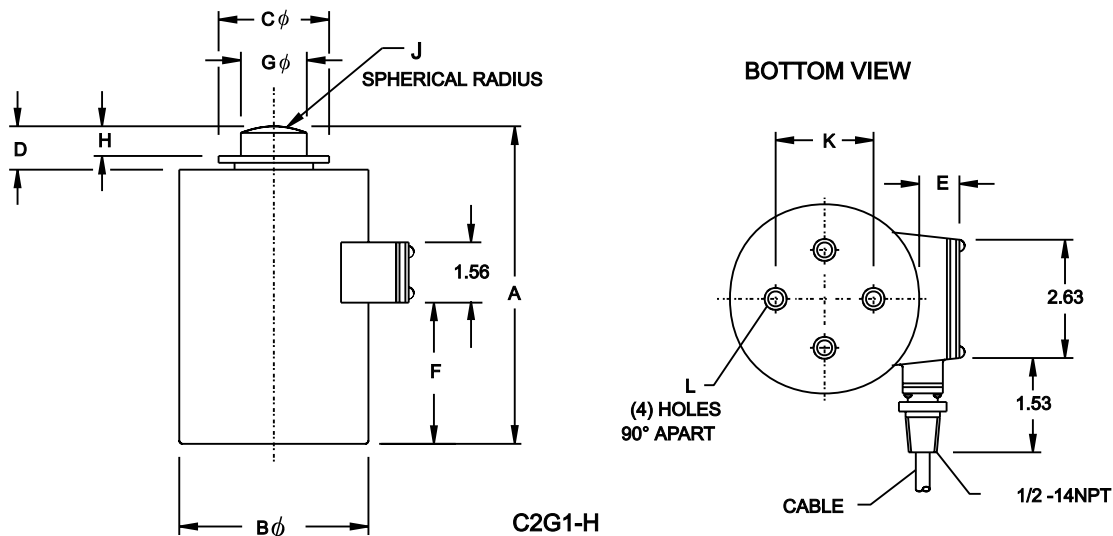

C2G1-H

CAPACITY (lbs)	A	B ϕ	C ϕ	D	E	F	G ϕ	H	J	K	L
20,000	7 1/2	4 1/2	2 1/4	3/4	7/8	3 7/16	1 1/4	1/2	6	2 3/8	3/8-24UNF-2B X 3/8 DP
50,000	7 1/2	4 1/2	2 1/4	3/4	7/8	3 7/16	1 1/4	1/2	6	2 3/8	3/8-24UNF-2B X 3/8 DP
100,000	9 1/8	6	3 1/8	1 1/16	1 1/32	4 3/4	1 3/4	5/8	12	4	1/2-20UNF-2B X 3/4 DP
200,000	11 5/8	8	4 1/2	1 1/16	1 1/8	6 1/4	2 1/2	5/8	12	5 1/2	5/8-18UNF-2B X 1 DP

High Temperature Load Cell

SPECIFICATIONS		PARAMETER	VALUE
PERFORMANCE		TEMPERATURE	
Rated output	2 mV/V \pm 0.25%	Safe range	\pm 15 to \pm 400°F
Non-linearity—% RO	0.20	Compensated range	\pm 15 to \pm 400°F
Hysteresis—% RO	0.10	Effect on zero balance	0.0025% RO/°F
Repeatability—% RO	0.10	Effect on rated output	0.005% Load/°F
Creep—% RO (20 minutes)	0.10	ADVERSE LOAD RATINGS	
ELECTRICAL		Safe overload	150% RO
Recommended excitation	10 VAC-DC	Ultimate overload	300% RO
Zero balance—% RO	2.5		
Input resistance	375 Ω \pm 8 Ω @ 400°F		
Output resistance	350 Ω \pm 10.0 Ω		
Number of bridges	single		
Min. Insulation resistance			
Bridge to ground	1000 M Ω (@ 50 VDC)		
Shield to ground	1000 M Ω (@ 50 VDC)		
Electrical connection	20 ft cable		

BLH Nobel is continually seeking to improve product quality and performance. Specifications may change accordingly.



Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.