



DS 201

Electronic Pressure Switch

Ceramic Sensor

accuracy according to EN IEC 62828-2:
0.5 % span

Nominal pressure

from 0 ... 400 mbar up to 0 ... 600 bar

Contacts

1 or 2 independent PNP contacts,
freely configurable

Analogue output

2-wire: 4 ... 20 mA

3-wire: 4 ... 20 mA / 0 ... 10 V

others on request

Special characteristics

- ▶ indication of measured values on a 4-digit LED display
- ▶ rotatable and configurable display module

Optional versions

- ▶ **IS-version**
Ex ia = intrinsically safe for gases
- ▶ pressure port PVDF
- ▶ customer specific versions



The electronic pressure switch DS 201 is the successful combination of

- ▶ intelligent pressure switch
- ▶ digital display

and has been specially designed for universal usage in industry applications. The DS 201 is available with flush pressure ports for viscous, pasty and highly contaminated media.

As standard the DS 201 offers a PNP contact and a rotatable display module with 4-digit LED display. Optional versions like e.g. an intrinsically safe version and an analogue output complete the profile.

Preferred areas of use are

-  Plant and Machine Engineering
-  Environmental Engineering
(water – sewage – recycling)



Input pressure range ¹																		
Nominal pressure gauge [bar]	-1...0	0.4	0.6	1	1.6	2.5	4	6	10	16	25	40	60	100	160	250	400	600
Nominal pressure abs. [bar]	-	-	0.6	1	1.6	2.5	4	6	10	16	25	40	60	100	160	250	400	600
Level gauge [mH ₂ O]	-	4	6	10	16	25	40	60	100	160	250	400	600	-	-	-	-	-
Overpressure [bar]	4	1	2	2	4	4	10	10	20	40	40	100	100	200	400	400	600	800
Burst pressure ≥ [bar]	7	2	4	4	5	5	12	12	25	50	50	120	120	250	500	500	650	880
Vacuum resistance	P _N ≥ 1 bar: unlimited vacuum resistance P _N < 1 bar: on request																	

¹ PVDF pressure port possible for nominal pressure ranges up to 60 bar

Contact ²	
Standard	1 PNP contact
Options	2 independent PNP contacts
Max. switching current	4 ... 20 mA / 2- and 3-wire: contact rating 125 mA, short-circuit resistant; V _{Switch} = V _S - 2V 0 ... 10 V / 3-wire: contact rating 125 mA, short-circuit resistant
Accuracy of contacts ³	≤ ± 0.5 % span
Repeatability	≤ ± 0.2 % span
Switching frequency	max. 10 Hz
Switching cycles	> 100 x 10 ⁶
Delay time	0 ... 100 sec

² max. 1 contact for 2-wire current signal with plug ISO 4400 as well as 2-wire current signal with IS-protection
no contact possible with 3-wire in combination with plug ISO 4400

Analogue output (optionally) / Supply	
2-wire current signal	4 ... 20 mA / V _S = 13 ... 36 V _{DC} permissible load: R _{max} = [(V _S - V _{Smin}) / 0.02 A] Ω response time: < 10 msec
2-wire current signal with IS-protection	4 ... 20 mA / V _S = 15 ... 28 V _{DC} permissible load: R _{max} = [(V _S - V _{Smin}) / 0.02 A] Ω response time: < 10 msec
3-wire current signal	4 ... 20 mA / V _S = 19 ... 30 V _{DC} adjustable (turn-down of span 5:1) ⁴ permissible load: R _{max} = 500 Ω response time: < 0.5 sec
3-wire voltage signal	0 ... 10 V / V _S = 15 ... 36 V _{DC} permissible load: R _{min} = 10 kΩ response time: < 10 msec
Accuracy ³	≤ ± 0.5 % span

³ accuracy according to EN IEC 62828-2- limit point adjustment (non-linearity, hysteresis, repeatability)

⁴ with turn-down of span the analogue signal is adjusted automatically to the new measuring range

Thermal effects (Offset and Span) / Permissible temperatures	
Thermal error	≤ ± 0.2 % span / 10 K
in compensated range	-25 ... 85 °C
Permissible temperatures ⁵	medium: -40 ... 125 °C electronics / environment: -40 ... 85 °C storage: -40 ... 100 °C

⁵ for pressure port of PVDF the permissible temperature is -30 ... 60 °C



Electrical protection	
Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function
Electromagnetic compatibility	emission and immunity according to EN 61326

Mechanical stability	
Vibration	10 g RMS (25 ... 2000 Hz) according to DIN EN 60068-2-6
Shock	500 g / 1 msec according to DIN EN 60068-2-27

Materials			
Pressure port / housing	Standard: Option for G1/2" open port (up to 60 bar): Options for G3/4" flush (0.6 bar ≤ P _N ≤ 25 bar):	pressure port	housing
		stainless steel 1.4404 PVDF PVDF	stainless steel 1.4404 stainless steel 1.4404 PVDF
Display housing	PA 6.6, polycarbonate		
Seals (media wetted)	standard: FKM option: EPDM (P _N ≤ 160 bar), NBR others on request		
Diaphragm	ceramics Al ₂ O ₃ 96 %		
Media wetted parts	pressure port, seals, diaphragm		

Explosion protection (only for 4 ... 20 mA / 2-wire)						
Approval AX14-DS 201	IBExU06ATEX1049 X zone 1: II 2G Ex ia IIC T4 Gb (connector) / II 2G Ex ia IIB T4 Gb (cable)					
Safety tech. maximum values	$U_i = 28 \text{ V}$, $I_i = 93 \text{ mA}$, $P_i = 660 \text{ mW}$, $C \approx 0 \text{ nF}$, $L_i \approx 0 \text{ }\mu\text{H}$					
Max. switching current ⁶	70 mA (max. permissible inductivity: 4.7 mH)					
Permissible temperatures for environment	-25 ... 70 °C					
Connecting cables (by factory)	cable capacitance: signal line/shield also signal line/signal line: 160 pF/m cable inductance: signal line/shield also signal line/signal line: 1 $\mu\text{H}/\text{m}$					
⁶ the real switching current in the application depends on the power supply unit						
Miscellaneous						
Display	4-digit, red 7-segment-LED display, digit height 7 mm, range of indication -1999 ... +9999; accuracy 0.1 % \pm 1 digit; digital damping 0.3 ... 30 sec (programmable); measured value update 0.0 ... 10 sec (programmable)					
Option oxygen application ⁷	for $P_N \leq 15 \text{ bar}$: O-ring in 70 EPDM 281 (with BAM-approval); permissible maximum values are 15 bar / 60° C and 10 bar / 90° C for $P_N \leq 25 \text{ bar}$: O-ring in FKM Vi 567 (with BAM-approval); permissible maximum values are 25 bar / 150° C					
Current consumption (without contacts)	2-wire signal output current: max. 25 mA 3-wire signal output current: approx. 45 mA + signal current 3-wire signal output voltage: approx. 45 mA					
Ingress protection	IP 65					
Installation position	any					
Weight	approx. 200 g					
Operational life	> 100 x 10 ⁶ cycles					
CE-conformity	EMC Directive: 2014/30/EU Pressure Equipment Directive: 2014/68/EU (module A) ⁸					
ATEX Directive	2014/34/EU					
⁷ not possible with flush pressure ports						
⁸ This directive is only valid for devices with maximum permissible overpressure > 200 bar						
Wiring diagrams						
2-wire-system (current)			3-wire-system (current / voltage)			
Pin configuration						
Electrical connection	M12x1 plastic (5-pin)	M12x1 metal (5-pin)	M12x1 plastic (8-pin)	ISO 4400	Binder series 723 (5-pin)	cable colours (DIN 47100)
Supply +	1	1	1	1	1	wh (white)
Supply -	3	3	3	2	3	bn (brown)
Signal + (only 3-wire)	2	2	2	3	2	gn (green)
Contact 1	4	4	4	3	4	gy (grey)
Contact 2	5	5	5	-	5	pk (pink)
Contact 3	-	-	6	-	-	-
Contact 4	-	-	7	-	-	-
Shield	via pressure port	plug housing/pressure port	via pressure port	ground contact	plug housing/pressure port	ye/gn (yellow/green)
Electrical connections (dimensions in mm)						
M12x1 plastic (5-pin)	M12x1 metal (5-pin)	M12 x1 (8-pin)	ISO 4400	Binder series 723 (5-pin)	cable outlet PVC $\varnothing = 4.9\text{mm}$ cable outlet PUR $\varnothing = 5.7\text{mm}$	
10 [0.39]	13 [0.51]	13 [0.51]	12 [0.47]	10 [0.37]	30.5 [1.2]	
⁹ different cable types and lengths available, permissible temperature depends on kind of cable; standard: 2 m PVC cable (without ventilation tube, permissible temperature: -5 ... 70 °C)						










Mechanical connections (dimensions in mm)

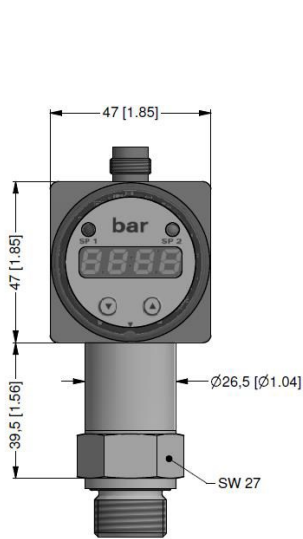

⇨ metric threads and others on request



rotatability of display module



G3/4" semi-flush (DIN 3852), (0.6 bar ≤ pN ≤ 60 bar gauge)

This data sheet contains product specification. Properties are not guaranteed. Subject to change without notice.

¹⁰ possible for nominal pressure ranges $P_N \leq 40$ bar

Objednáací kód DS 201

Ordering code DS 201

15.01.2024

DS 201

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Measured pressure																			
Gauge	7	8	2																
Gauge in m H ₂ O	7	8	E																
Absolute	7	8	3																
Input [bar]																			
0 ... 0,4				4	0	0	0												
0 ... 0,6				6	0	0	0												
0 ... 1				1	0	0	1												
0 ... 1,6				1	6	0	1												
0 ... 2,5				2	5	0	1												
0 ... 4				4	0	0	1												
0 ... 6				6	0	0	1												
0 ... 10				1	0	0	2												
0 ... 16				1	6	0	2												
0 ... 25				2	5	0	2												
0 ... 40				4	0	0	2												
0 ... 60				6	0	0	2												
0 ... 100				1	0	0	3												
0 ... 160				1	6	0	3												
0 ... 250				2	5	0	3												
0 ... 400				4	0	0	3												
0 ... 600				6	0	0	3												
-1 ... 0 (accuracy 1%)				X	1	0	2												
Customer				9	9	9	9												
Customer - underpressure				X	X	X	X												
Analogue output																			
4 ... 20 mA / 2-wire																			1
0 ... 10 V / 3-wire																			3
4 ... 20 mA / 3-wire																			7
Intrinsic safety 4 ... 20 mA / 2-wire ¹																			E
Customer																			9
Switching output																			
1 switching contact (version 3-wire only with 5-pin connector) ^{1,2}																			1
2 switching contacts (only with 5-pin connector) ^{1,2}																			2
Accuracy																			
0,5 %																			5
1% (underpressure)																			8
0,5 % including Calibration Certificate																			T
1 % including Calibration Certificate (underpressure)																			U
Table of measured values for accuracy 0,5 %																			N
Customer																			9
Electrical connection																			
Connector DIN 43650 (ISO 4400) (IP 65) ²																			1 0 0
Connector M 12 x 1 (5-pin) (IP 65)																			N 0 1
Connector M 12 x 1 (5-pin) (IP 65) - metal																			N 1 1
Cable outlet incl.cable (standard: 2 m PVC cable without ventilation tube, permissible temperatures: -5 ... 70 °C)																			T A 0
Customer																			9 9 9
Mechanical connection																			
G 1/2" DIN 3852																			1 0 0
G 1/2" EN 837-1/-3 (manometric)																			2 0 0
G 1/4" DIN 3852																			3 0 0
G 1/4" EN 837-1/-3 (manometric)																			4 0 0
G 1/2" flush diaphragm ³																			F 0 0
G 3/4" DIN 3852 with flush sensor ⁴																			K 0 0
G 1/2" DIN 3852 open (P _N ≤ 60 bar) (material PVDF)																			H 0 0
1/2" NPT																			N 0 0
1/4" NPT																			N 4 0
Customer																			9 9 9
Seals																			
Viton (FKM)																			1
EPDM (P _N ≤ 160 bar)																			3



BD SENSORS s.r.o.
Hradištská 817
CZ – 687 08 Buchlovice

Tel.: +420 572 411 011
Fax: +420 572 411 497

www.bdsensors.cz
info@bdsensors.cz



Společnost BD SENSORS s.r.o. je certifikována společností TÜV SÜD Czech dle normy ISO 9001.

NBR	5					
Customer	9					
Pressure port						
Stainless steel 1.4404 (316 L)	1					
PVDF ($P_N \leq 60$ bar) (only with H00) ⁵	B					
Customer	9					
Diaphragm						
Ceramics Al ₂ O ₃ 96 %	2					
Customer	9					
Special version						
Standard				0	0	0
Oxygen applications (with FKM seal and up to 25 bar) ⁶				0	0	7
Customer				9	9	9

0,-...without additional charge

On request...in accordance with the producer

Surcharges for calibration are not subject to any discounts. Subject to change.

This document contains the specification for ordering the product; detailed technical parameters of the product and its possible variants are given in the data sheet.

BD SENSORS reserves the right to change sensor specifications without further notice.

1 with IS version max.1 contact possible

2 with connector ISO 4400 and output 2-wire version only max. 1 contact possible; with 3-wire version no contact possible

3 absolute on request

4 possible for nominal pressure ranges $P_N \geq 0.6$ bar up to $P_N \leq 60$ bar gauge

5 PVDF only with G1/2" DIN 3852 open pressure port (up to 60 bar) and G3/4" DIN 3852 with flush sensor ($0.6 \text{ bar} \leq P_N \leq 25 \text{ bar}$); permissible medium temperature

6 oxygen application with FKM-seal up to 25 bar possible, flush version on request



BD SENSORS s.r.o.
Hradištská 817
CZ – 687 08 Buchlovice

Tel.: +420 572 411 011
Fax: +420 572 411 497

www.bdsensors.cz
info@bdsensors.cz

Společnost BD SENSORS s.r.o. je certifikována společností TÜV SÜD Czech dle normy ISO 9001.

