

IFRM 05P17A1/PL

Inductive proximity switch - subminiature

Article number: 11082474

Overview

- 1,6 mm
- PNP make function (NO)
- cable, 2 m
- -25 ... 75 °C
- IP 67



Picture similar



Technical data

General data

| | |
|--|------------------------------|
| Mounting type | Flush |
| Nominal sensing distance S _n | 1,6 mm |
| Hysteresis | 2 ... 20 % of S _r |
| Output indicator | LED red |

Electrical data

| | |
|---------------------------------------|------------------------|
| Switching frequency | < 3 kHz |
| Voltage supply range +V _s | 6 ... 30 VDC |
| Current consumption max. (no load) | 12 mA |
| Output circuit | PNP make function (NO) |
| Voltage drop V _d | < 2 VDC |
| Output current | < 100 mA |

Electrical data

| | |
|-----------------------------|-----|
| Short circuit protection | Yes |
| Reverse polarity protection | Yes |

Mechanical data

| | |
|-------------------------|----------------------|
| Type | Cylindrical threaded |
| Material (sensing face) | LCP |
| Housing material | Stainless steel |
| Dimension | 5 mm |
| Housing length | 25 mm |
| Connection types | Cable, 2 m |
| Tightening torque max. | 2 Nm (Front: 1,4 Nm) |

Ambient conditions

| | |
|-----------------------|----------------|
| Operating temperature | -25 ... +75 °C |
| Protection class | IP 67 |

Remarks


- Standard execution with PUR cable
- 25 mm housing length

IFRM 05P17A1/PL

Inductive proximity switch - subminiature

Article number: 11082474

Dimension drawing

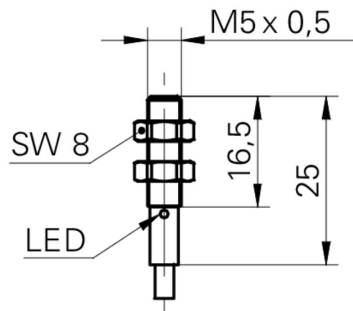

Connection diagram

